



Keep this manual for future use.

This child restraint conforms to all applicable Federal Motor Vehicle Safety Standards.

This child restraint is NOT certified for use in aircraft.

For Children

Size **SMALL**

- Model Number: WR-S-US-XXXX
- at least 3 years of age
- 37.5 to 49 inches (95 to 125 cm)
- 30 to 55 lbs (15 to 25 kg)

Size **LARGE**


- Model Number: WR-L-US-XXXX
- at least 6 years of age
- 47 to 57 inches (120 to 145 cm)
- 47 to 80 lbs (22 to 36 kg)



Table of Contents

WhizRider – Child Restraint Parts	4
Warnings	5
Correct Use – Checklist	7
Selecting a Vehicle Seating Location	8
Vehicle Seat Belt Systems	10
Put Vest on Child	13
Securing Child in Vehicle	16
Removing Child and Child Restraint	19
Transportation and Storage	20
Re-Use After a Crash	21
Additional Information	22

WhizRider – Child Restraint Parts

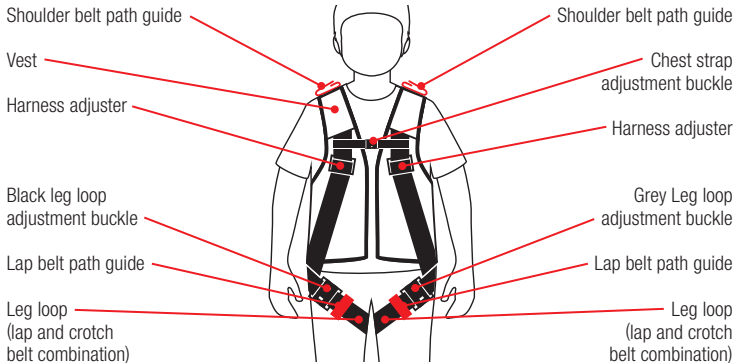

Failure to follow these instructions and child restraint labels can result in child striking the vehicle's interior during a sudden stop or crash.

- Follow all instructions in this manual and on the child restraint.
- Small Size: Use only with children who weigh between 30 and 55 lbs. (15 and 25 kg) and whose height is between 37.5 and 49 inches (95 and 125 cm).
- Large Size: Use only with children who weigh between 47 and 80 lbs. (22 and 36 kg) and whose height is between 47 and 57 inches (120 and 145 cm).
- Snugly adjust the belts provided with this child restraint around your child.
- Never use this child restraint with only a lap belt.
- Use only the vehicle's lap and shoulder belt system when restraining a child in this child restraint. Lap and shoulder belt portion must be inserted through both lap and the shoulder belt path guides.
- Snuggly adjust vehicle lap and shoulder belt around child according to vehicle owner's manual.
- Position and tighten vehicle's lap belt, then position and adjust vehicle's shoulder belt.
- Vehicle's lap belt must be low on hips contacting thighs and vehicle's shoulder belt must be centered on child's shoulder.


⚠ WARNING! DEATH or SERIOUS INJURY can occur

- Do not position vehicle's lap belt up on abdomen.
- Do not use this child restraint after a crash, if it is damaged, missing parts or the instruction manual is missing.
- Discontinue use after 7 years from date of manufacture.
- Child should not wear any thick jacket (down jacket or similar) under the vest.
- Stop using the child restraint when it is too small to fit around child's chest and thighs.
- Store this child restraint when not occupied. Unsecured items may injure other occupants in a sudden stop or crash.
- Never leave child unattended.
- Do not use this child restraint with vehicle's LATCH car seat attachment system.
- Do not use this child restraint in a vehicle front seat location unless recommended in vehicle owner's manual.
- Do not use this child restraint on aircrafts or other non-certified applications.
- Vehicle belts must be flat against child and must not be twisted.
- Only use this child restraint on forward facing seats.
- Register your child restraint with the manufacturer.

Correct Use – Checklist

7

- ✓ Understand and follow the instruction manual and product labels.
- ✓ Snugly adjust the belts provided with this child restraint around your child.
- ✓ Position and tighten lap belt, then position and adjust shoulder belt.
- ✓ Lap belt must be low on hips, contacting thighs and not up on abdomen.
- ✓ Shoulder belt must be centered on child's shoulder. Never positioned under child's arm or behind back.
- ✓ Top of child's ears are below top of vehicle seat back or headrest.
- ✓ Child sits upright, with back against vehicle seat back.
- ✓ Child must sit in a forward facing seat.

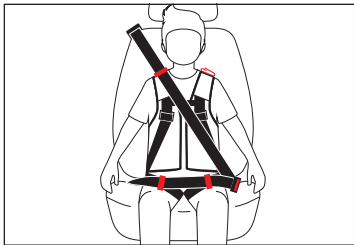


Drive safely, do not speed and use the child restraint properly according to the instruction manual. No child restraint can guarantee protection from injury in every situation.

Selecting a Vehicle Seating Location

⚠ WARNING!
DEATH or SERIOUS INJURY
can occur

- Refer to vehicle owner's manual for child restraint systems and vehicle seat belt use.
- Do not use child restraint in a seating position with a frontal air bag unless recommended by the vehicle manufacturer.
- Never use child restraint with vehicle lap belt only.



National Highway Traffic Safety Administration (NHTSA) alerts vehicle owners that according to accidents statistics, children age 12 and under are safer when properly restrained in the rear seating positions rather than the front seating positions. For vehicles with air bags, refer to vehicle owner's manual for child restraint installation information.

Note: Use this child restraint always with a vehicle lap and shoulder belt system.

Selecting a Vehicle Seating Location

9

Seating Locations Not To Use:


1. Low vehicle seat back.

Do not use seating locations in which the top of vehicle seat back is below top of child's ear.




2. Seats facing side or rear.

Do not use on side or rear-facing vehicle seats.



Side Facing
Vehicle Seats



Rear Facing
Vehicle Seat


Vehicle Seat Belt Systems

Use this child restraint always with a vehicle lap and shoulder belt. Do not use the vehicle belt systems in this section.

1. Lap belts only systems

Vehicle seating locations with only a lap belt:

- Never use seating locations with lap belt only.

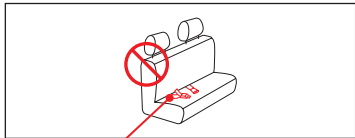


Lap Belt Only

2. LATCH Anchorage System

(Lower Anchorage and Tether for Children):

- Never use the vehicle lower anchorages of the LATCH system with this child restraint.

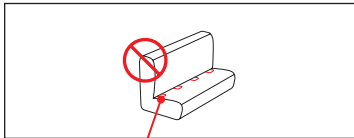


Lower Anchorages

3. Passive Restraint Systems

a. Motorized shoulder belts:


- Do not use seating locations with motorized shoulder belts.

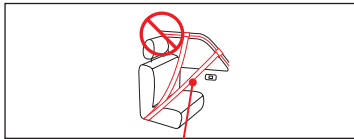

Motorized Shoulder Belt

b. Door mounted lap and shoulder belt:

- Do not use front seating locations where seat belts are mounted to the door.

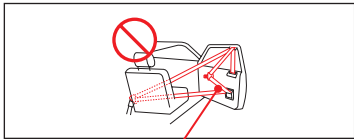

Belts Mounted To Door

Vehicle Seat Belt Systems

4. Inflatable Seat Belt Systems

- Do not use this child restraint on a vehicle seating location with an inflatable seat belt.

5. Switchable Retractors

- A retractor is the mechanism that winds the seatbelt in and out. It is also what locks the seatbelt during a sudden stop or crash.
- Several vehicles have a belt system in which the retractor can be switched from the emergency locking mode (ELR) to an automatic locking mode (ALR).
- **The ALR mode is not designed for use with child restraint systems.**

⚠ WARNING!
DEATH or SERIOUS INJURY
can occur

- Snugly adjust the belts provided with this child restraint around the child.
- Stop using the child restraint when it is too small to fit around child's chest and thighs.

This child restraint is available in two sizes:

Size SMALL

- Model Number: WR-S-US-XXXX
- at least 3 years of age
- 37.5 to 49 inches (95 to 125 cm)
- 30 to 55 lbs (15 to 25 kg)



Size LARGE

- Model Number: WR-L-US-XXXX
- at least 6 years of age
- 47 to 57 inches (120 to 145 cm)
- 47 to 80 lbs (22 to 36 kg)

Put Vest on Child


1. Place Vest on Child:

- Place vest behind child's back and insert child's arms through arm openings of vest.
- Close the chest strap buckle (1) and adjust snugly around chest.
- Loop the left leg loop strap around the left thigh and close the black buckle (2). Loop the right leg loop strap around the right thigh and close the grey buckle (3).



2. Adjust size of harness:

- Adjust the size with the left (4) and right (5) harness adjuster. Make sure that the node between upper body and leg loop belts of the harness is positioned on hip bone level (6).





Put Vest on Child

15

- b. Adjust the position of the shoulder belt path guide that the guide is at the same level as the top of child's shoulder (1).
- To relocate the shoulder belt path guide, slide shoulder belt path guide up or down.

3. Tighten leg loops:

- a. Pull adjustable left and right leg loop belts (lap and crotch belt combination) tight (2).

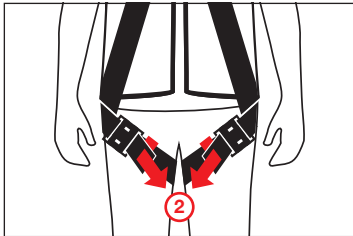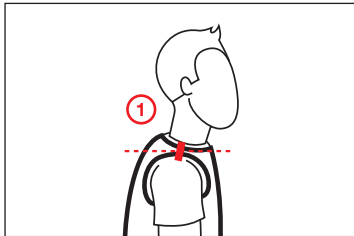

Securing Child in Vehicle



 **WARNING! DEATH or SERIOUS INJURY can occur**

- Use only with the vehicle's lap and shoulder belt.
- Do not use with a lap belt only or lower anchorages of the LATCH System.
- Child must sit upright with rump and back in contact with the vehicle seat back.
- Top of child's ears must be below top of vehicle seat back or headrest.
- To avoid misuse and injury, this child restraint and vehicle belts should be secured and adjusted by an adult. Never allow child to buckle or adjust belts.
- Vehicle belts must be flat against child and must not be twisted.
- Position and snugly adjust lap belt, then position and adjust shoulder belt.
- Vehicle's lap belt must be low on hips, contacting thighs and not up on abdomen.
- Vehicle's shoulder belt must be centered over child's shoulder. (Not up on neck or off shoulder).
- Do not use shoulder belt loose, positioned under child's arm or behind child.

Securing Child in Vehicle

17

1. Position child on vehicle seat with child's rump and back against vehicle seat back cushion.
2. Buckle the vehicle seat belt (1).
3. Position both lap belt path guides (2) on the top of each thigh.
4. Secure child with the vehicle lap and shoulder belt.
5. Insert vehicle lap belt completely into both lap belt path guides (3). Snugly adjust lap belt.
6. Snugly adjust vehicle lap belt.




Securing Child in Vehicle

7. Check position of shoulder belt path guide.
 - The guide has to be at the same level as the top of child's shoulder (1).
 - To relocate the path guide, slide shoulder belt guide up or down.
8. Insert vehicle shoulder belt completely into the shoulder belt path guide (2).
9. Snugly adjust vehicle shoulder belt.



10. Lap and shoulder belt path guide:
 - The vehicle lap belt has to be completely inserted into both lap belt path guides.
 - The vehicle shoulder belt has to be completely inserted into the shoulder belt path guide.

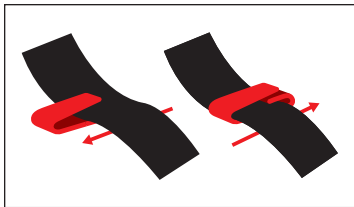

Removing Child and Child Restraint

19

To Remove Child:

1. Slide vehicle shoulder belt out of shoulder belt path guide.
2. Slide vehicle lap belt out of both lap belt path guides.
3. Unbuckle vehicle lap and shoulder belt.
4. Remove child from the vehicle seat.

Note: If removal of the shoulder or lap belt is not possible due to the vehicle belt continuing to tighten, the vehicle seat belt should be cut to remove the child.

To Take off Vest:

1. Open chest strap and leg loop buckles.
2. Take off vest.
3. Pack it back into the product bag.

Note: For better re-use, smartridr recommends to close both leg loop buckles before wrapping it.

Transportation and Storage

The WhizRider child restraint easily fits into any bag and can be folded as necessary.

For optimal protection use the WhizRider bag.



WARNING!

**DEATH or SERIOUS INJURY
can occur**

Unsecured Items in the vehicle can injure other occupants in a sudden stop or crash. Always store smartridr child restraint in a secure location such as glove box or other storage facilities.

WhizRider use high quality components that absorb some of the forces in a vehicle's crash when used by a child. Such crash forces can deform parts of the child restraint, which may not be detectable by visual inspection. As a result, the Child Restraint **MUST** be replaced after any crash in which the child restraint was used.



WARNING!
DEATH or SERIOUS INJURY
can occur

- Do not allow any use of this child restraint after a crash where a child was secured in the child restraint.
- Do not sell or allow others to use a child restraint that has been used in a crash.
- This child restraint must be destroyed and replaced if it was used during a crash.

Certification:

- **Motor Vehicle** – this child restraint conforms to all applicable Federal Motor Vehicle Safety Standards.

This child restraint is for use in passenger cars, multi-purpose vehicles as vans and SUVs, trucks and buses that have vehicle lap and shoulder belt systems.

- **Aircraft** – **This Restraint is Not Certified for Use in Aircraft.** Aircraft seats do not provide a lap and shoulder belt system.

- **Instruction Manual Storage:**

The instruction manual is stored inside the child restraint product bag. Do not remove and keep it for future use.

- **Care and Cleaning:**

Surface wash with mild solution of soap and water. Do not use fabric softener and do not machine wash. Air dry. Do not tumble dry.

- **Using:**

Discontinue use after 7 years from the “Manufactured in” date printed on child restraint.

- **Replacement Parts:**

This child restraint does not have any replaceable parts.

Registration and Recall:

- Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Fill out the registration card attached to the child restraint and mail today. Or send your name, address, email address if available and the restraint model number and manufacturing date to smartridr

smartridr

1321 Upland Dr., Suite 10963,

Houston, TX 77043, USA

or call 1-800-317-8029

or register online at

www.whizrider.com/register

For Recall Information:

- For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>
Visit www.whizrider.com online.

Keep Instruction Manual for Future Use

www.whizrider.com